



# Sealant Technologies

## Select the right GORE® Gasket for your application


### Characteristics of GORE® Sealant Products

- Made of expanded polytetrafluoroethylene (ePTFE)
- Superior chemical resistance (pH 0–14)
- -269 °C to +315 °C (-452 °F to +600 °F)
- Highly conformable to achieve outstanding tightness




### STEP 1:

Verify that the Application meets GORE® Gasketing Qualifications

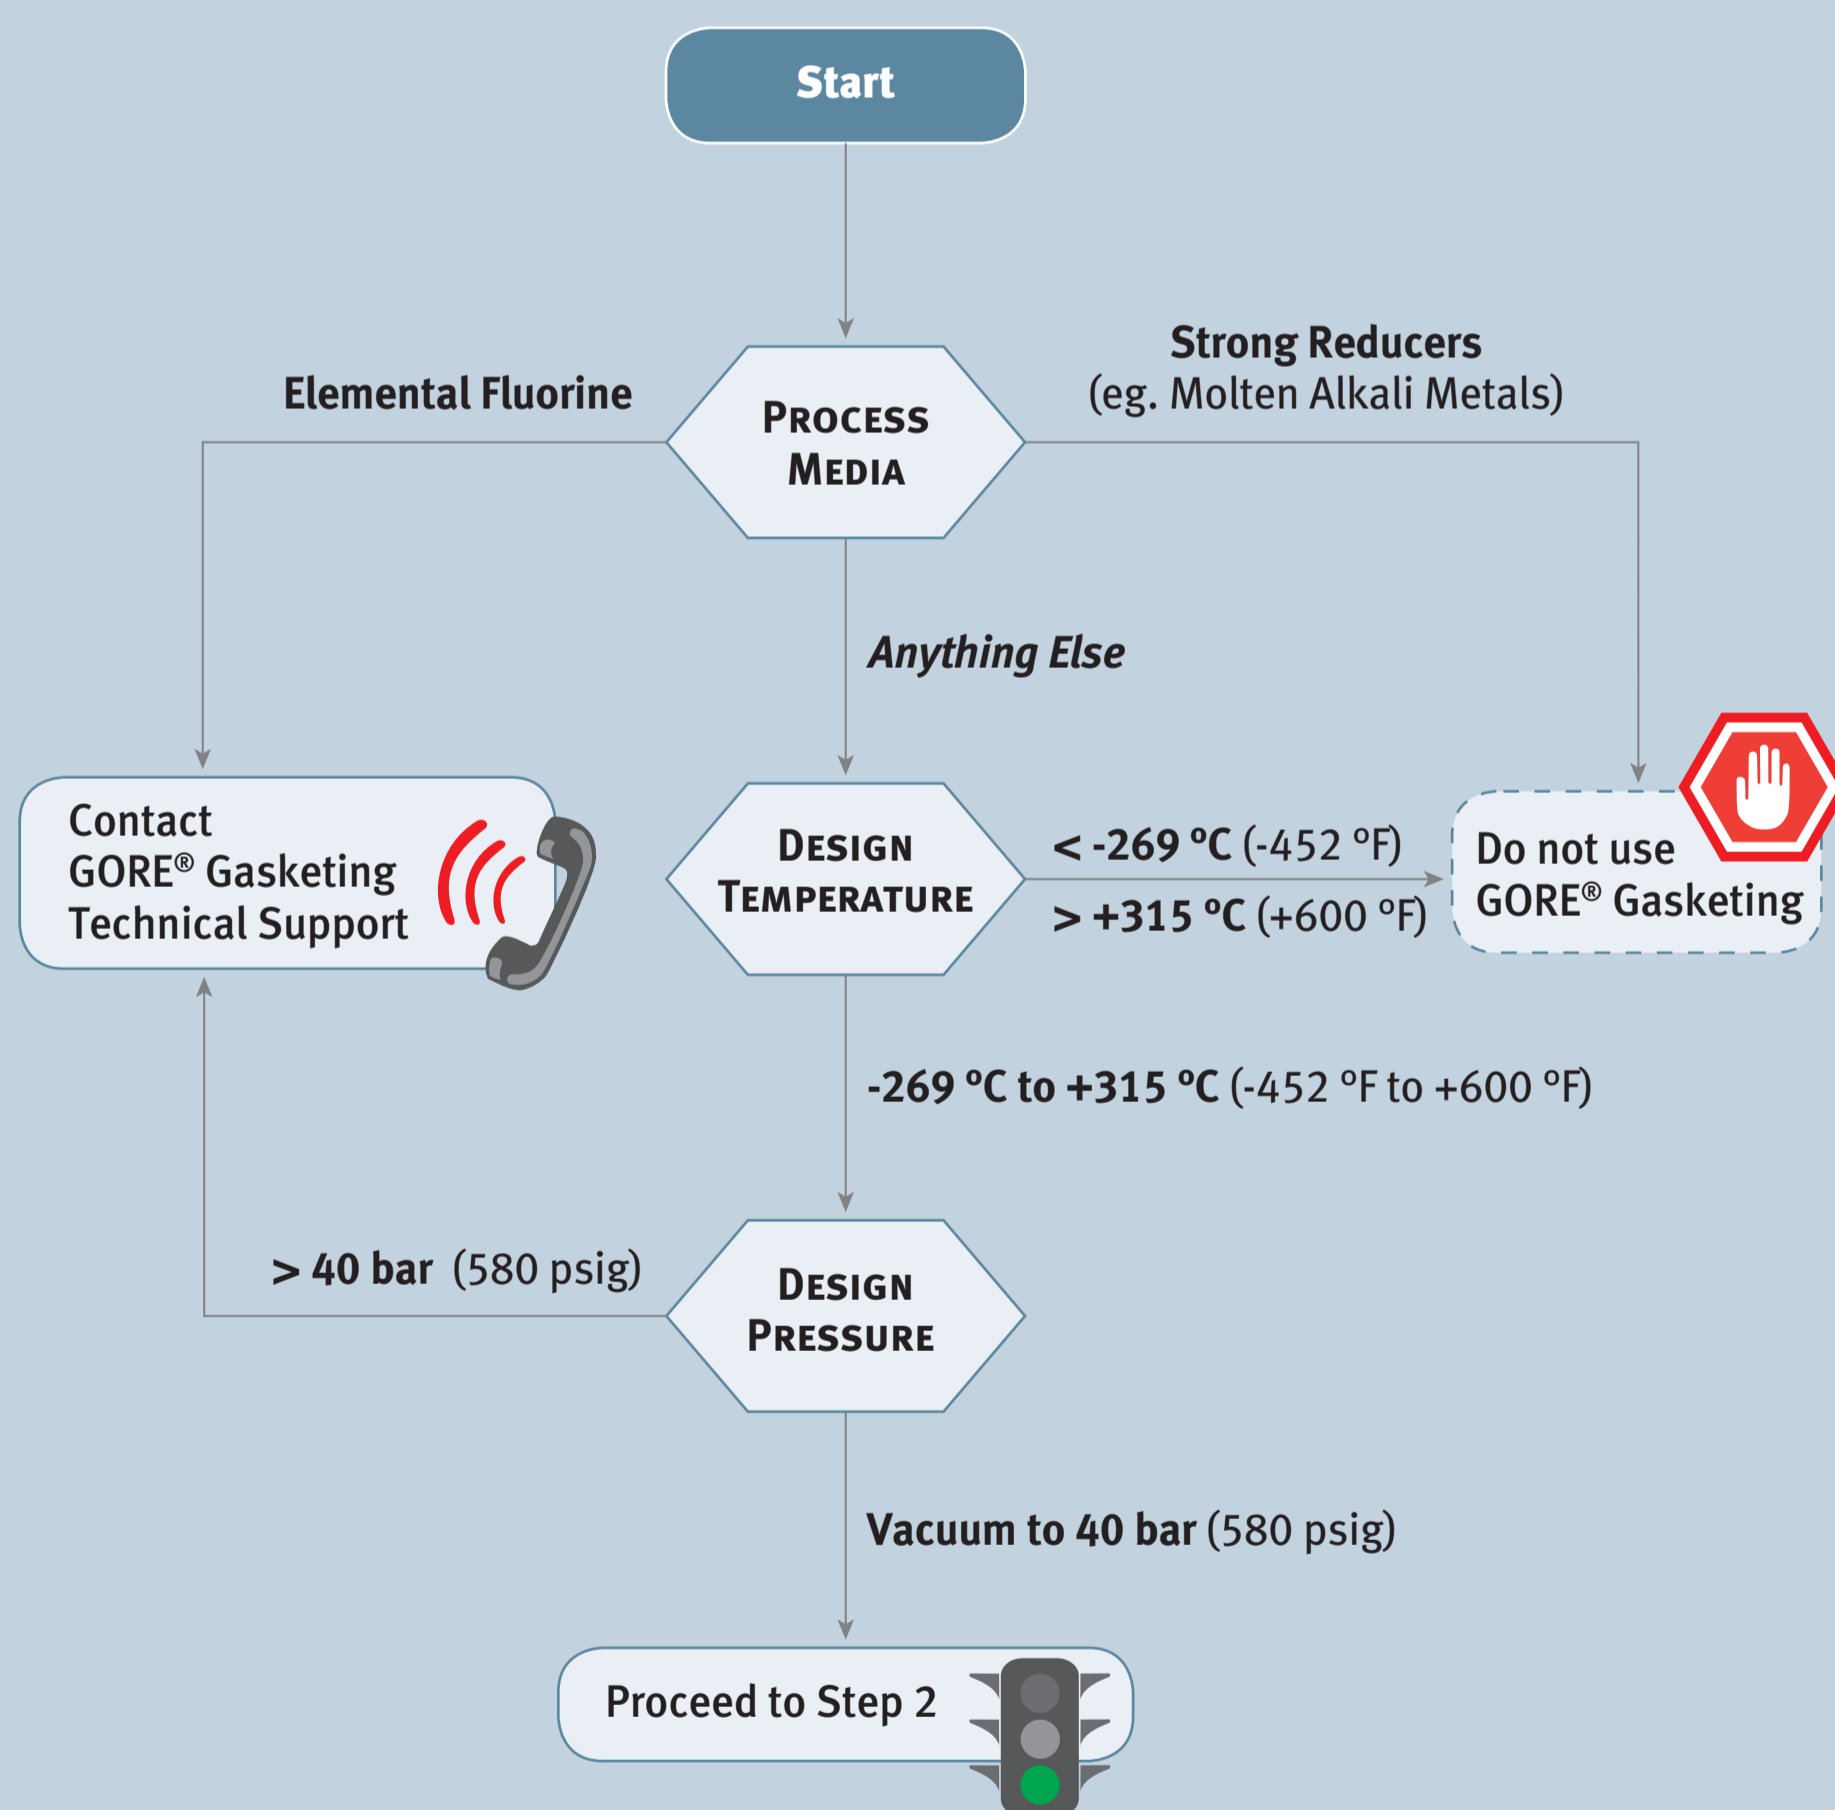

### STEP 2:

Narrow the selection of GORE® Gasketing Products for the Application

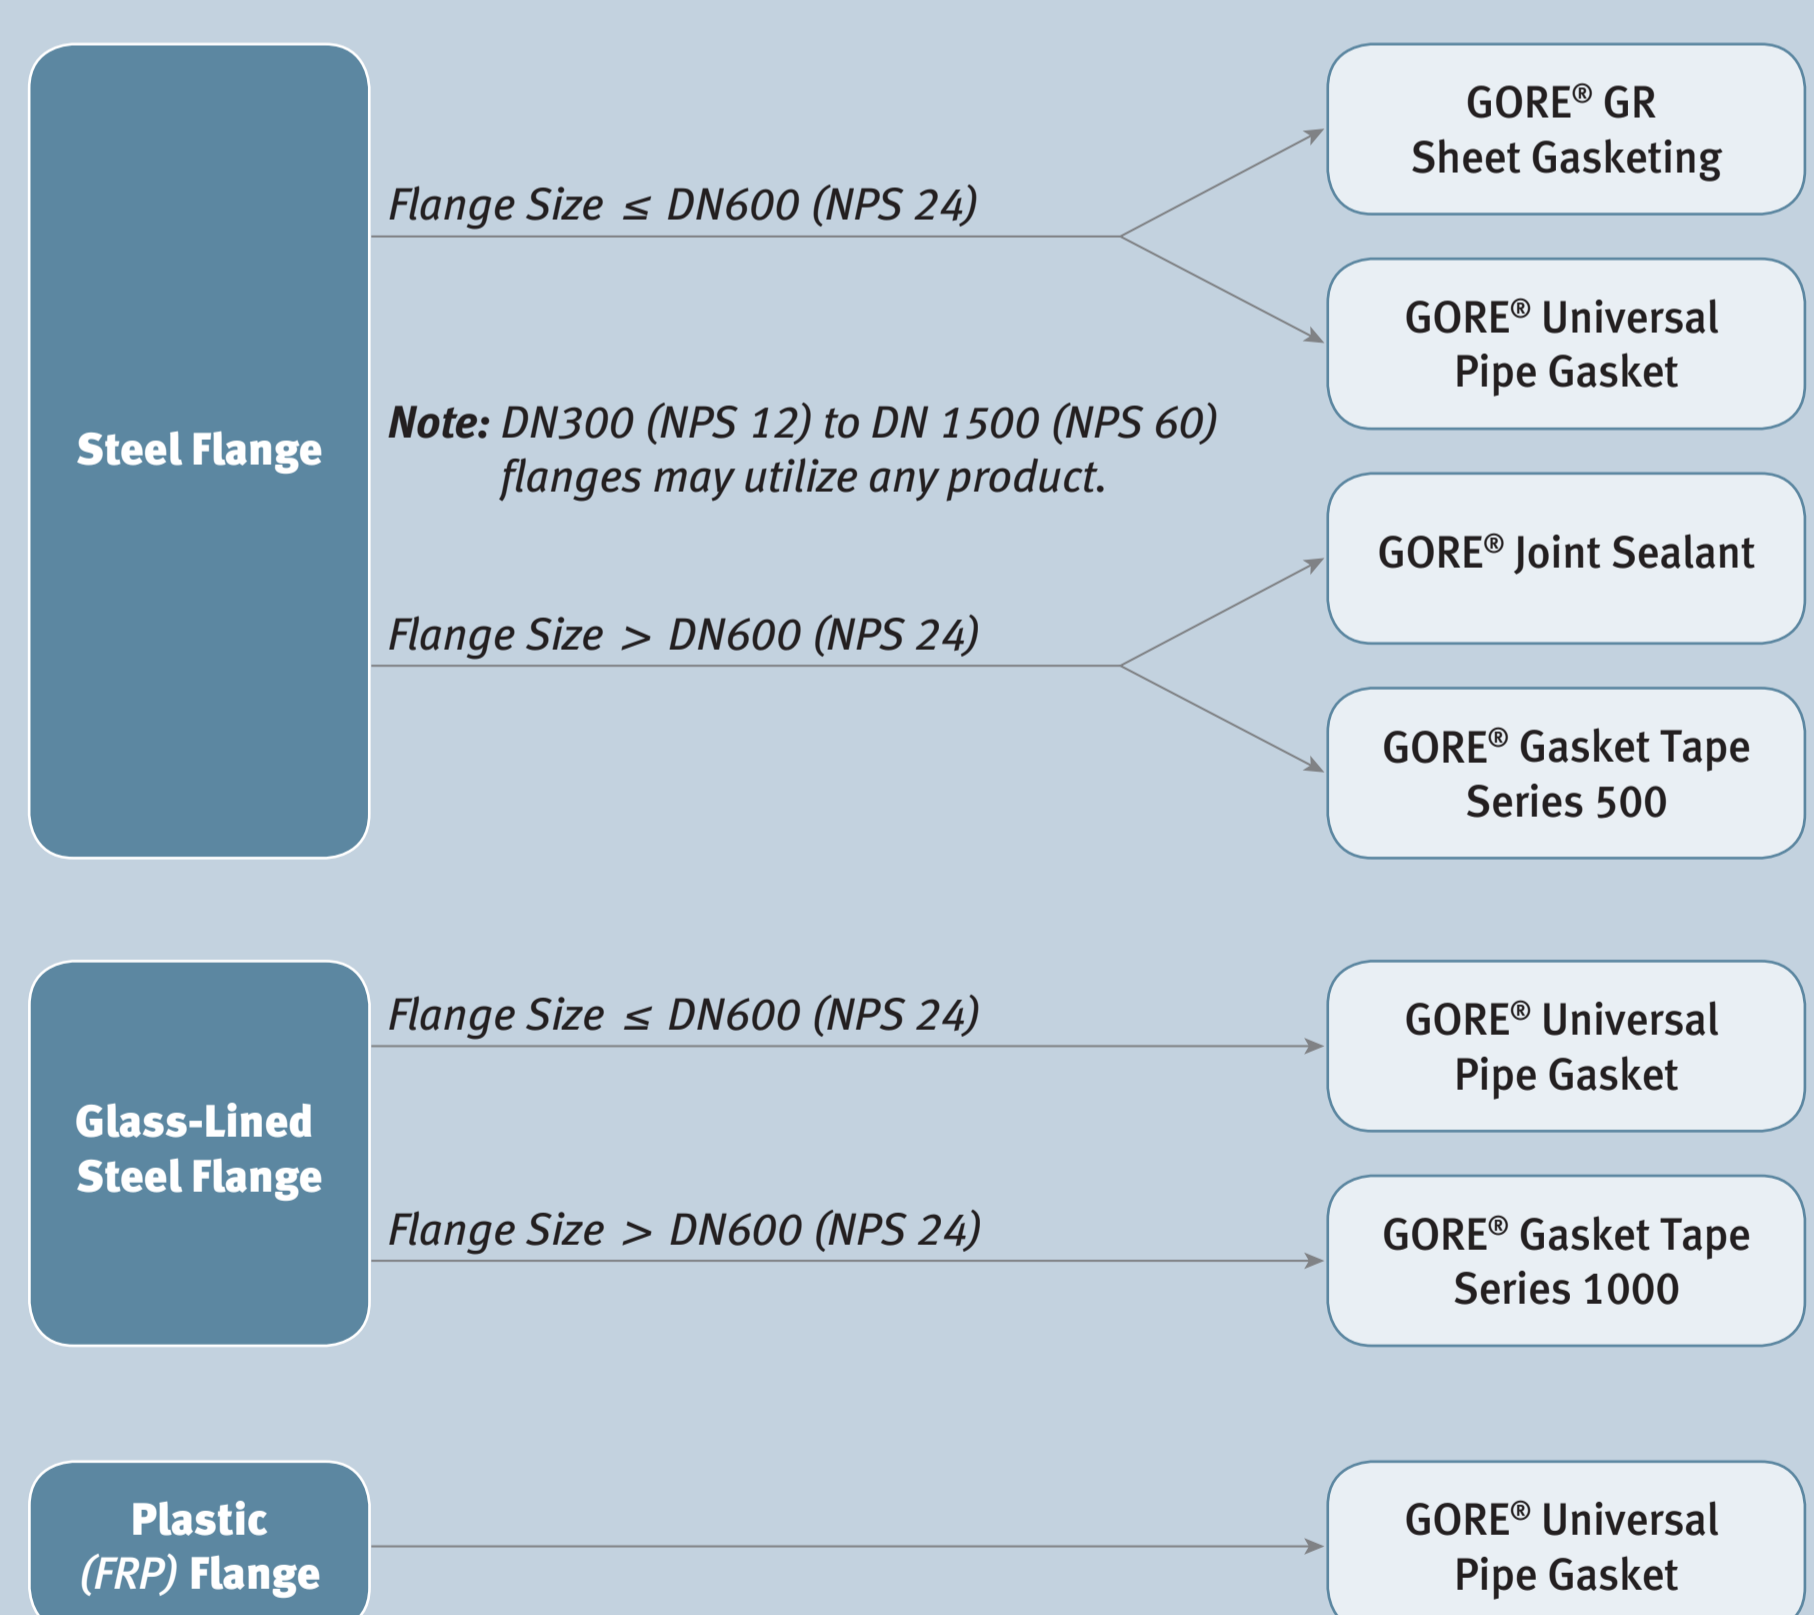

► For other flange materials, please contact your Gore representative.

### Need help? Please contact:

(Name, Logo and Contact Information for distributor)



FOR INDUSTRIAL USE ONLY. Not for use in food, drug, cosmetic or medical device manufacturing, processing, or packaging operations.

All technical information and advice given here is based on our previous experiences and/or test results. We give this information to the best of our knowledge, but assume no legal responsibility. Customers are asked to check the suitability and usability in the specific application, since the performance of the product can only be judged when all necessary operating data are available. Specifications are subject to change without notice. Gore's terms and conditions of sale apply to the purchase and sale of the product.

GORE and designs are trademarks of W. L. Gore & Associates © 2017 W. L. Gore & Associates, Inc.