


Valid only at time of printing

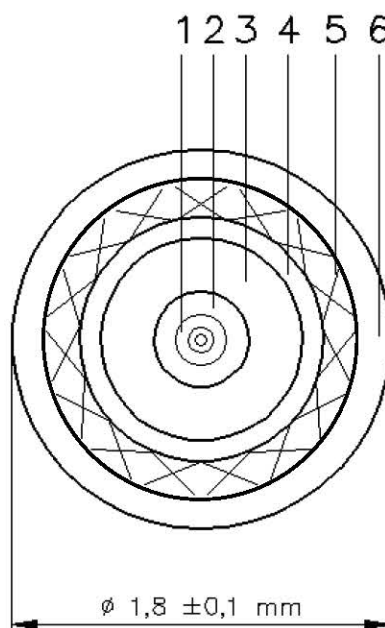

Construction

- | | |
|-----------------------------------|-------------------------|
| 1. Optical Fiber, multimode | 62.5/125/245 |
| 2. Buffer material | ePTFE |
| 3. Sheath material colour | Thermoplastic natural |
| 4. Buffer material | ePTFE |
| 5. Braided Strain Relief material | Aramid Fiber |
| 6. Jacket material colour | Fluoropolymer see table |

<i>Ident-no.</i>	<i>Product-no.</i>	<i>Colour</i>
GSC-13-84640-04	138464004	yellow
GSC-13-84640-07	138464007	violet

Characteristics

Operating temperature range	-65°C to +135°C
Weight	4 g/m max.
Tensile strength	200 N max.
Optical Loss	max. 4,0 dB/km at 850 nm max. 3,0 dB/km at 1300 nm

Ersatz für / Replacement for		Ersetzt durch / Replaced by		Formular Beschreibung / Description	
				Benennung / Description	
				FIBER OPTIC SIMPLEX CABLE	
C	21.11.16	GD	10427		
B	03.12.15	SH	9206		
A	30.10.14	SH	-		
Revision	Date	Author	PLFECO no.		
 W.L. Gore & Associates GmbH Nordring 1 D-91785 Pleinfeld				Identr. / Ident No. GSC-13-84640-00	
Tel 09144 / 601-0 Fax 09144 / 6361, 6816				Seite / Page 1/1	