


Valid only at time of printing


### Construction

- |                                   |                       |
|-----------------------------------|-----------------------|
| 1. Optical fiber, multimode       | 50/125/245            |
| 2. Buffer material                | ePTFE                 |
| 3. Sheath material colour         | Thermoplastic natural |
| 4. Buffer material                | ePTFE                 |
| 5. Braided strain relief material | Aramid fiber          |
| 6. Jacket material colour         | Fluoropolymer violet  |

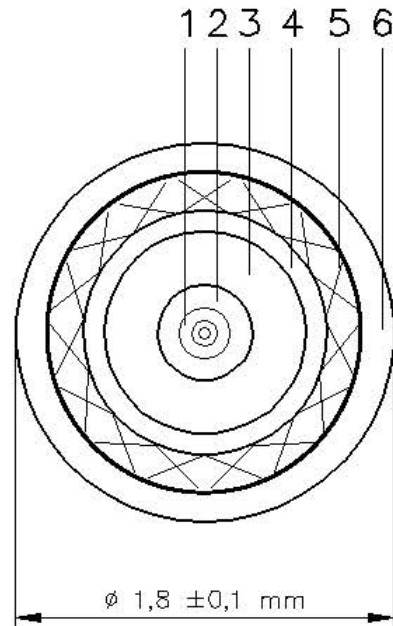

### Characteristics

- |                             |   |
|-----------------------------|---|
| Operating temperature range | -65°C to +135°C                                 |
| Weight                      | 4 g/m max.                                      |
| Tensile strength            | 200 N max.                                      |
| Optical Loss                | ≤ 5,0 dB/km at 850 nm<br>≤ 3,0 dB/km at 1300 nm |
| Bandwith                    | OM3   |

Ersatz für / Replacement for		Ersetzt durch / Replaced by		Formular Beschreibung / Description	
				Benennung / Description <b>Fibre Optic Simplex Cable OM3</b>	
D	17.05.18	SH	11873		
Revision	Date	Author	PLFECO no.		
 W. L. GORE & ASSOCIATES GMBH Nordring 1 • 91785 Pleinfeld • Germany Tel. +49 9144 6010 • Fax +49 9144 6816 gore.com				Identnr. / Ident No. <b>GSC-13-84943-07</b>	Seite / Page 1/1