


Valid only at time of printing

### Construction


- 1. Optical Fiber, multimode 50/125/245
- 2. Buffer material ePTFE
- 3. Sheath material colour Thermoplastic natural
- 4. Buffer material ePTFE
- 5. Braided Strain Relief material Aramid Fiber
- 6. Jacket material colour Fluoropolymer see table

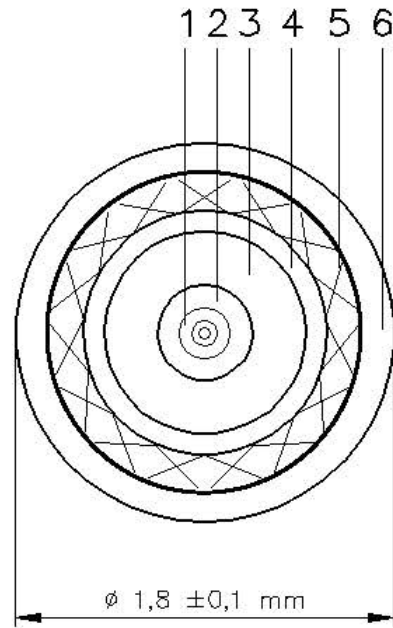

<i>Ident-no.</i>	<i>Product-no.</i>	<i>Colour</i>
GSC-13-85423-04	138542304	yellow
GSC-13-85423-07	138542307	violet

### Characteristics

- Operating temperature range -65°C to +135°C
- Weight 4 g/m max.
- Tensile strength 200 N max.
- Optical Loss  $\leq 5,0 \text{ dB/km at } 850 \text{ nm}$   
 $\leq 3,0 \text{ dB/km at } 1300 \text{ nm}$
- Bandwith OM4

Ersatz für / Replacement for		Ersetzt durch / Replaced by		Formular Beschreibung / Description	
				Benennung / Description <b>Fibre Optic Simplex Cable OM4</b>	
A		28.11.17	SH	-	
Revision	Date	Author	PLFECO no.		
 W. L. GORE & ASSOCIATES GMBH Nordring 1 • 91785 Pleinfeld • Germany Tel. +49 9144 6010 • Fax +49 9144 6816 gore.com				Identnr. / Ident No. <b>GSC-13-85423-00</b>	
				Seite / Page 1/1	