

**CONSTRUCTION: QUAD CABLE**

**A. SINGLES (4 PLACES):**

CONDUCTOR: AWG 24(19 / 36) SILVER PLATED COPPER

INSULATION: PTFE OVER ePTFE

0.055 MAX DIAMETER PER SINGLE

COLORS: RED x GREEN, BLUE x ORANGE

**B. FILLER: FEP, (0.022) DIAMETER**

**C. BINDER: ePTFE**

**D. SHIELD #1: AWG 40(1) SPC BRAID 92% MINIMUM COVERAGE**

**E. SHIELD #2: AWG 38(1) SPC BRAID 92% MINIMUM COVERAGE**

**F. JACKET: 0.003 MIN WALL LASER MARKABLE WHITE HSTF**

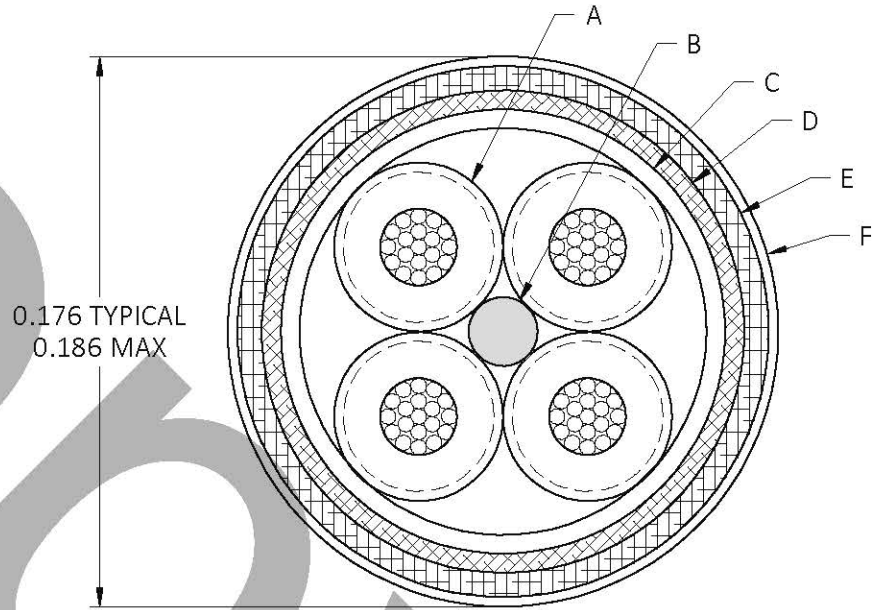
**ELECTRICAL REQUIREMENTS (MEASURED ON 50 FT SAMPLE):**

1. IMPEDANCE:  $110^{+6}_{-4} \Omega$  MEASURED DIFFERENTIALLY
2. CAPACITANCE:  $11.0 \pm 1.0$  pF / FT  
BETWEEN PAIRS, GROUND FLOATING
3. TIME DELAY: (1.25) nSEC / FT
4. ATTENUATION: 6.8 dB / 100 FT MAX @ 100 MHz  
10.9 dB / 100 FT MAX @ 250 MHz  
15.5 dB / 100 FT MAX @ 500 MHz  
22.5 dB / 100 FT MAX @ 1 GHz
5. DIELECTRIC WITHSTANDING VOLTAGE:  
1500 V<sub>RMS</sub> (CONDUCTOR / CONDUCTOR)  
1000 V<sub>RMS</sub> (CONDUCTOR / SHIELD)
6. SKEW: 200.0 pSEC / 50 FT MAX WITHIN PAIR



**OTHER REQUIREMENTS:**

1. WEIGHT: 31.0 LB / 1000 FT MAX
2. TEMPERATURE: -55° TO +200° C
3. MARKING:  
W L GORE AND ASSOCIATES INC  
PART NUMBER [PART NUMBER]  
CAGE CODE [CAGE CODE]
4. FUNCTIONAL CHARACTERISTICS:  
MEETS OR EXCEEDS  
NEMA-WC27500 SECTION 3.9

REVISIONS			
Rev	Description	Date	Chg'd By
B	Construc. Changes & Note Changes	30 MAR 2006	ECL
C	Impedance & Capacitance Change	05 MAY 2006	ECL
D	Changed Tolerance On Overall Insulation	02 APR 2012	ECL
E	EM2 ECO - 8259 T.Mayer EM2 ECO - 8734 N.Reyes	26 JUN 2018 08 FEB 2019	TKG
F	EM2 ECO - 8873 T.Mayer	22 MAR 2019	TKG



Valid only at time of printing

PARENTHESES DENOTE REFERENCE DIMENSIONS DIMENSIONS ARE IN INCHES DO NOT SCALE DRAWING DEBURR SHARP EDGES  Third Angle Projection INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5M-1994 (R1999)		UNLESS OTHERWISE SPECIFIED .X ± N/A .XX ± N/A .XXX ± N/A .XXXX ± N/A FRACTIONS ± N/A ANGLES ± N/A SURFACE TEXTURE N/A BREAKS AND FILLETS N/A MAX		 W. L. GORE & ASSOCIATES, INC. (Gore) Performance Solutions Division 101 Lewisville Road, Elkton, MD 21921 410/392-3300 © 2006, 2019 W. L. Gore & Associates, Inc. By acceptance of this document you agree that all rights to drawings, specifications, processes and other data contained therein, as well as the proprietary and novel features of the subject matter, are reserved by Gore and are disclosed in confidence. They are not to be manufactured, used, sold or disclosed to others, nor are devices embodying such features or information derived from these disclosures to be used or disclosed, unless and until expressly authorized by Gore. These drawings, specifications, processes, etc., are and remain the property of Gore and are not to be copied or reproduced without express permission, and are to be returned upon request therefor.	
TITLE: AWG 2419 110 Ω QUAD CABLE				Title: AWG 2419 110 Ω QUAD CABLE	
Dwg Size: A		Sheet: 1 of 1		Scale: 16:1	
Rev Date: 22 MAR 2019		Drawing Number: RCN8647		Drawn: ECL Date: 08 MAR 2006 Rev Level: F	